


Blair Corporation

Manufacturer and Distributor

Wire Rope · Hardware · Chain · Cable Railing ·
Structural Strand Assemblies · Cordage · Castings · Forgings ·

MALLEABLE WIRE ROPE CLIPS

Conforms to Federal Specification FF-C-450, Type 1 – Class 2

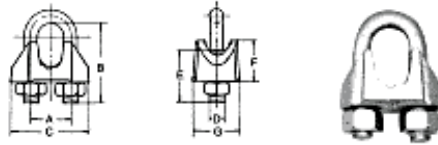

Rope Size (in)	Torque in lbs (ft)	Weight per 100 (lbs)	Dimensions (in)						
			A	B	C	D	E	F	G
1/16	2	3	0.38	0.65	0.69	0.15	0.45	0.38	0.45
1/8	3	4	0.50	0.81	0.94	0.18	0.50	0.50	0.56
3/16	4.5	6.3	0.56	0.94	1.06	0.25	0.56	0.56	0.63
1/4	15	13	0.75	1.19	1.31	0.31	0.75	0.69	0.75
5/16	15	15	0.75	1.31	1.44	0.31	0.84	0.75	0.75
3/8	30	21	0.88	1.63	1.63	0.38	1.00	0.84	0.88
7/16	40	37	1.06	2.00	1.88	0.44	1.19	1.00	1.06
1/2	45	37	1.06	2.00	1.88	0.44	1.19	1.00	1.06
9/16	50	59	1.25	2.31	2.09	0.50	1.38	1.25	1.28
5/8	75	59	1.25	2.31	2.09	0.50	1.38	1.25	1.28
3/4	75	84	1.31	2.56	2.38	0.56	1.56	1.44	1.56
7/8	130	125	1.63	3.06	2.38	0.63	1.81	1.75	1.81
1	130	166	1.88	3.44	3.00	0.63	2.00	2.06	2.00
1 1/8	200	243	2.00	4.00	3.38	0.75	2.75	2.19	2.06

Minimum number of malleable clips to use based on rope size:

1/8" – 3/8" 2 Clips
7/16" – 5/8" 3 Clips
3/4" – 5/8" 4 Clips

www.BlairWireRope.com

3610 Palomar Valley Dr
Spring, Texas 77386

Phone: 832-928-9655 · Fax: 281-528-0394