


Blair Corporation

Manufacturer and Distributor

Wire Rope · Hardware · Chain · Cable Railing ·
Structural Strand Assemblies · Cordage · Castings · Forgings

ROTATION RESISTANT 8 X 19 CLASS

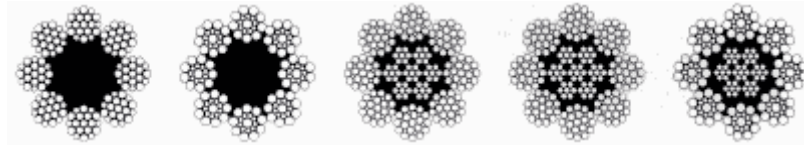

Specification: RR-W-410D

8 X 19 Class FC Rotation resistant

8 X 19 Class IWRC Rotation resistant

Improved Plow Steel Galvanized and Extra Improved Plow Steel Uncoated

Nominal Diameter (minimum)	Approx. Weight		Nominal Breaking Strength			
			Uncoated		Galvanized	
	FC	IWRC	FC	IWRC	FC	IWRC
inches	lb/ft	lb/ft	lb	lb	lb	lb
3/8	0.22	0.26	10,480	13,260	9,440	13,260
1/2	0.39	0.47	18,460	23,200	16,620	23,200
9/16	0.50	0.60	23,200	29,400	20,800	29,400
5/8	0.61	0.73	28,600	36,200	25,800	36,200
3/4	0.88	1.06	41,000	51,800	37,000	51,800
7/8	1.20	1.44	55,400	70,000	49,800	70,000
1	1.57	1.88	72,000	91,000	64,800	91,000

www.BlairWireRope.com

3610 Palomar Valley Dr
Spring, Texas 77386

Phone: 832-928-9655 · Fax: 281-528-0394